


HT60-18X(N)

Single Glass TOPCon PV Module

HIGH High power

HT60-18X(N)

510W/515W/520W/525W/530W

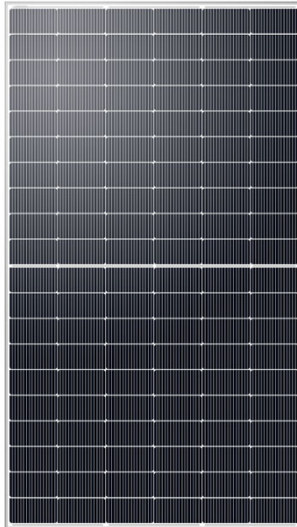

- Module Efficiency: 23.9%
- No. of Cells 120(6×20)
- Weight 23.5 (±0.5) kg
- Dimensions 1952×1134×30mm
- For Australia market



MULTIWAY+

Shanghai Aerospace Automobile Electromechanical Co., Ltd.
 Website: www.ht-saae.com.au
 Address: 222 Caoxi Rd, the 8th Floor of Spaceflight Building, Shanghai P.R. China

Made in China



Half cut cell technology can reduce the internal power loss and improve module overall power. Excellent heat dissipation avoids hot spot production.

15/30Ys
 Product warranty
 15Yrs for ground mounted
 30Yrs for rooftop

30Ys

Warranty on power output

EL

Microcrack resistant enhance reliability, double EL tested of high quality control.




Entire module certified to with stand extreme wind(2400 Pa) and snow loads (5400 Pa)

TOPCon

The optimized number and width of main gate lines, Maximize the light receiving area of modules and Reduce module power consumption.



Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs.



All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.

0~+3%


Power sorting tolerance
 0~+3%
 guaranteed

Anti PID

PID resistant
 (available on request)

Comprehensive and first-rate certification system

IEC 61215:2021, IEC 61730:2023 Latest Standard
 SA 8000,ISO 9001,ISO 14001 and ISO 45001
 meeting the highest international standards
 Strict quality control



HT60-18X(N)-510W/515W/520W/525W/530W

Electrical Characteristics (STC)


Module Type	HT60-18X(N)				
Maximum Power(Pmax)	510W	515W	520W	525W	530W
Open Circuit Voltage(Voc)	43.7V	43.8V	44.0V	44.2V	44.4V
Short Circuit Current(Isc)	14.79A	14.87A	14.95A	15.03A	15.11A
Maximum Power Voltage(Vmp)	36.8V	37.0V	37.2V	37.4V	37.6V
Maximum Power Current(Imp)	13.87A	13.93A	13.99A	14.05A	14.11A
Module Efficiency	23.0%	23.3%	23.5%	23.7%	23.9%
Power/Voc/Isc Measurement Tolerances	±3%/±5%/±5%				
Maximum System Voltage	1500V DC(IEC)				
Maximum Series Fuse Rating	30A				
Operating Temperature	-40°C to +85°C				

* STC: AM 1.5, Irradiance 1000W/m², module temperature 25°C


Electrical Characteristics (NMOT)

Module Type	HT60-18X(N)				
Maximum Power(Pmax)	388W	392W	395W	399W	403W
Open Circuit Voltage(Voc)	42.0V	42.0V	42.2V	42.4V	42.6V
Short Circuit Current(Isc)	11.92A	11.98A	12.05A	12.11A	12.18A
Maximum Power Voltage(Vmp)	35.3V	35.5V	35.7V	35.9V	36.1V
Maximum Power Current(Imp)	10.99A	11.04A	11.06A	11.11A	11.16A


* NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

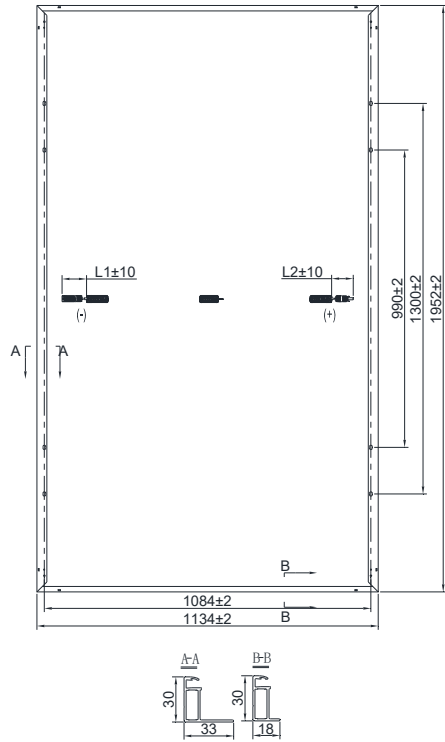

IV Curves

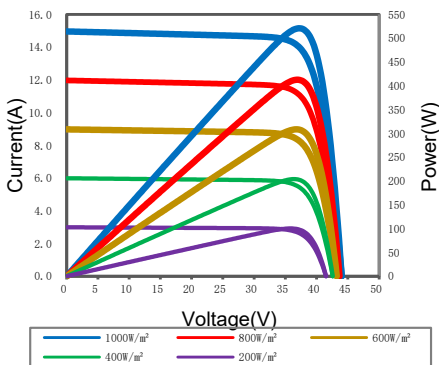

Warranty

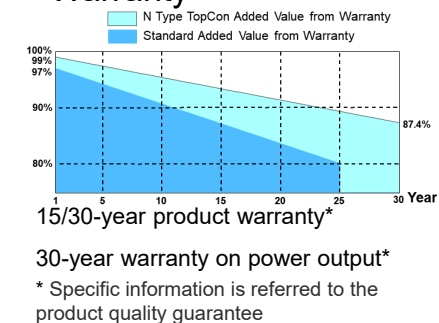

Nominal Module Operating Temperature(NMOT)	43±2°C
Temperature Coefficient of Pmax	γ (Pm) -0.31%/°C
Temperature Coefficient of Voc	β (Voc) -0.25%/°C
Temperature Coefficient of Isc	α (Isc) 0.046%/°C
Solar Cells	Monocrystalline
No. of Cells	120 (6×20)
Dimensions	1952×1134×30mm
Weight	23.5 (±0.5) kg
Glass	High light transmittance coated tempered glass
Frame	Anodized aluminum alloy
Junction Box/Connectors	IP68/PV-HT005-1 Shanghai Aerospace Automobile Electromechanical Co., Ltd.
Cable	4mm ² (IEC) length: (+) 200mm, (-) 300mm or customized
Fire Rating	Class C
Packaging Configuration	36 pcs/box: 864 pcs/ 40' HQ Container

*The module recycling should be carried out by the professional institutions at the end of module life cycle

*Copyright@2024V2 Specifications are subject to change without further notification*Only available in Australia